


Fuel dispenser

SK 56 Series

Features:

- Customer friendly operation
- Best exterior construction and good appearance
- Trustable highly precise metrology equipment
- High performance for electronic parts
- High quality explosion-proof motor with strong ability against power fluctuation
- Specially designed filtering systems with build-in re-cleanable filter
- With rich functions expansion like POS for smart card and bank card
- Flexible fuel application for gasoline, diesel, and kerosene etc.
- Works well in harsh conditions, like extremely cold, hot, humid, and sand-stormy environment

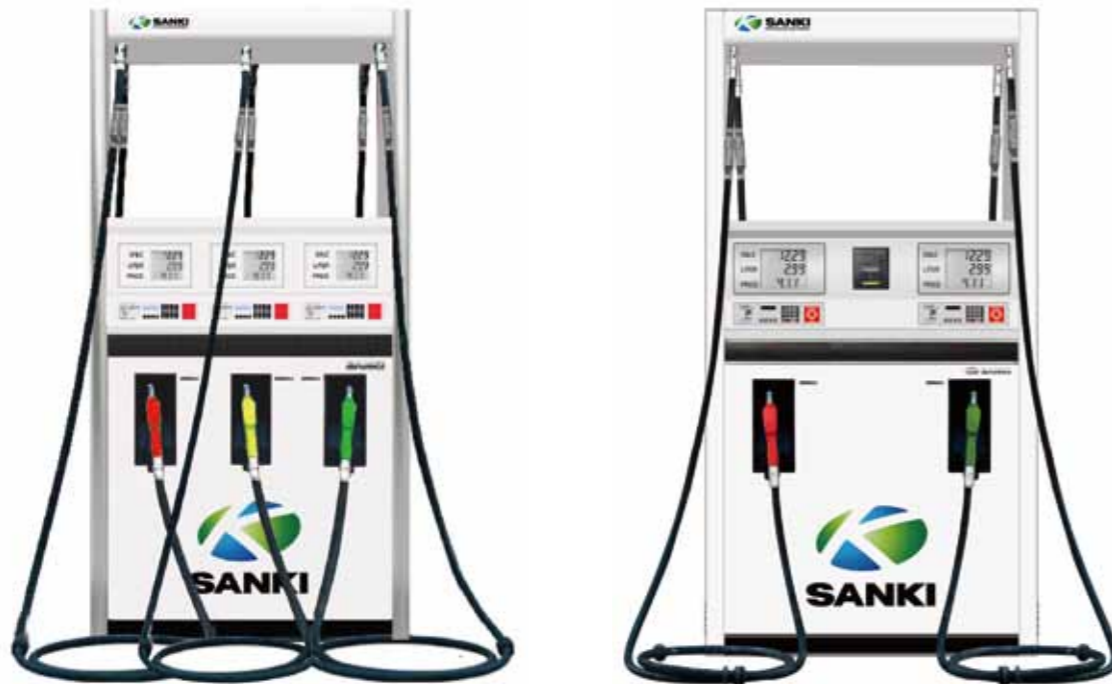

Beijing Sanki Petroleum Technology Co., Ltd
 № 16, 2nd Kechuang Str., Economic-Technological Development Area, Beijing, China, 100023
 Tel: +86 10 67892321 Fax: +86 10 67892321
 E-mail: business@sankichina.com <http://www.sankichina.com>

Technical specification:

Accuracy for the unit	±0.25%
Flow rate	50L/min
Ambient temperature	-25°C ~ +55°C; or -45°C ~ +55°C
Relative humidity	20% - 95%
Unit noise rate	< 70dB (A);
Inlet vacuum rate for suction pump	≥ 54kPa
Communication	With RS 485 port, or current loop
Power supply	AC 220V(-15%~+10%); (50/60±1)Hz AC 380V(-15%~+10%); (50/60±1)Hz
Digit of sale	0.00~99999.99
Digit of volume	0.00~9999.99
Digit of unit price	0.00~999.99
Totalizer of sale	0~99999999.99
Totalizer of volume	0~9999999.99

Basic Configurations:

- Main board, power board, display board, keypad, control board, pump, motor, flow meter, solenoid valve, electromagnetic counter, filter, nozzle, hose, sight glass

Optional Configuration:

- Stage II Vapor Recovery, card reader payment, double swivel, printer, heater for ultra low temperature, breakaway coupling, emergency shutoff button, shutoff valve for remote dispenser, standard electronics interface to POS and automation fuel management system

Model Range :

Model	Pump unit	Nozzle	Oil	Package Size (mm)	Gross Weight (kg)
SK56ZF424A	suction pump	4	2	1318*820*2480	367
SK56ZF422B		4	2	1318*820*2480	367
SK56ZF636A		6	3	1318*820*2480	427
SK56ZF632B		6	3	1318*820*2480	427
SK56ZF634B		6	3	1318*820*2480	427
SK56QF424A	Submersible pump	4	2	1318*820*2480	315
SK56QF422B		4	2	1318*820*2480	315
SK56QF636A		6	3	1318*820*2480	349
SK56QF632B		6	3	1318*820*2480	349
SK56QF634B		6	3	1318*820*2480	349